

DriPak® PE

POCKET FILTER WITH HIGH LOFT MEDIA

Features and Benefits

- ISO 16890 : Coarse and ePM10
- Developed to withstand moisture and snow conditions, this filter has high dust loading capacity and low pressure drop.

Applications

These kind of filters are mainly used as pre-filters in a multi-stage filtration system.



Eurovent Certification is not applicable for DriPak® PE Coarse version

Configurations


Filter media	Synthetic
Pocket design	Stitched, tapered - proprietary AAF Design
Gasket	Optional
Header standard material	Galvanized Steel 25 mm
Header optional material	Plastic 25 mm
Max. operating temperature	70 °C
Recom. final pressure drop	Subject to optimization of lifecycle costs, max 450 Pa
Recom. airflow range	75% - 125% (of nominal airflow)
Moisture resistance	100% relative humidity

Standard dimensions (Width x Height)


Dimension	592 x 592	490 x 592	287 x 592	592 x 490	592 x 287	287 x 287	490 x 490	287 x 892	490 x 892	592 x 892
Depth	635 + 525 + 360									
Pockets	6 + 8*	5 + 6*	3 + 4*	6 + 8*	6 + 8*	3 + 4*	5 + 6	3 + 4	5 + 6	6 + 8
Frame	Metall + Plastic							Metall		

* Only for DriPak® PE ePM10 version

Performance ISO Coarse 60% - 6 pockets

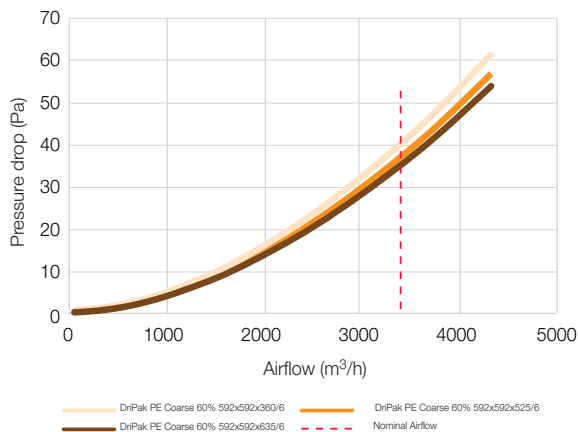


Performance ISO Coarse 70% - 6 pockets

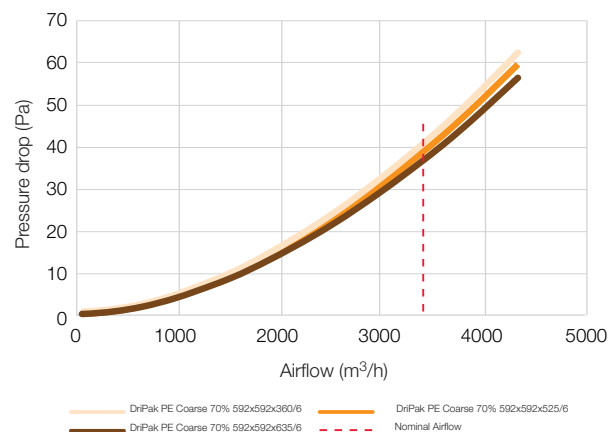


DriPak® PE

Performance ePM10 60% - 8 pockets

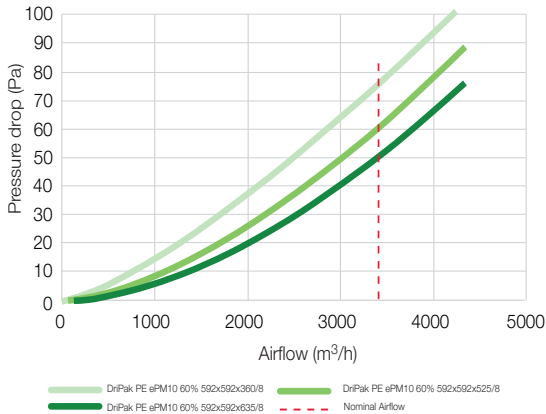

Performance ePM10 60% - 6 pockets

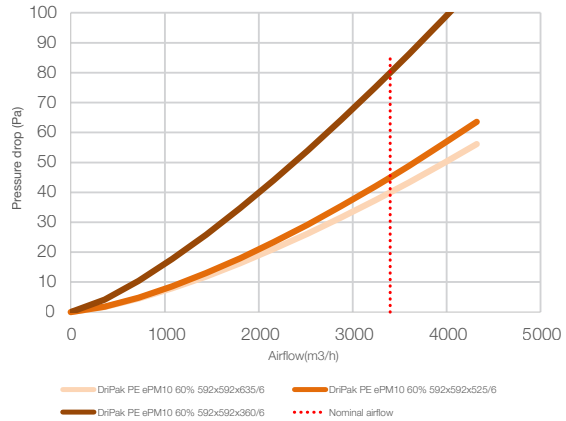

Technical data

Filter name	Dimensions (mm) 592 x 592 x Depth	Filter area (m ²)	Number of pockets	Initial dp (Pa) @ 3400 m ³ /h	Prev. rated EN779:2012	Acc. to Eurovent 4/21:2018		ISO 16890 Classification	Average values		
						kWh	Energy Rating		ePM1 (%)	ePM2,5 (%)	ePM10 (%)
DriPak PE Coarse 60%*	635	4,3	6	35	G4	N/A	N/A	Coarse 60%	N/A	N/A	N/A
	525	3,6	6	37	G4	N/A	N/A	Coarse 60%	N/A	N/A	N/A
	360	2,4	6	40	G4	N/A	N/A	Coarse 60%	N/A	N/A	N/A
DriPak PE Coarse 70%*	635	4,3	6	37	G4	N/A	N/A	Coarse 70%	N/A	N/A	N/A
	525	3,6	6	39	G4	N/A	N/A	Coarse 70%	N/A	N/A	N/A
	360	2,4	6	41	G4	N/A	N/A	Coarse 70%	N/A	N/A	N/A
DriPak PE ePM10 60%	635	4,3	6	40	N/A	830	C	ePM10 60%	8	16	60
	525	3,6	6	45	N/A	830	C	ePM10 60%	8	16	60
	360	2,4	6	80	N/A	1150	D	ePM10 60%	8	16	60
DriPak PE ePM10 60%	635	5,8	8	50	N/A	680	B	ePM10 60%	8	16	60
	525	4,7	8	60	N/A	770	C	ePM10 60%	8	16	60
	360	3,2	8	75	N/A	1050	D	ePM10 60%	8	16	60

Further dimensions are available on request. From January 1st 2018 filtration efficiency values are certified according to ISO 16890.

*Note: DriPak PE Coarse filters are not certified according to Eurovent.

DriPak® is a registered trademark of AAF International in the U.S. and other countries.

Dinair
An AAF Company

AAF
INTERNATIONAL
a member of **DAIKIN** group

AAF International
European Headquarters
Odenwaldstrasse 4, 64646 Heppenheim
Tel: +49 (0)6252 69977-0
aafintl.com

Specifications and performance data contain average values within existing production specification tolerances and are subject to change without prior notice. AAF explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this information.

©2025 AAF International and its affiliated companies.
PF_305_EN_042025